

# Zip Tudor

Over sink or under sink Water Heaters  
5 litre, 10 litre open outlet to single point



Zip Tudor 10Lt over sink model



5 litre under sink model 21052

### Features

- Hot water to your sink with no lag time significantly reducing water wastage.
- Adjustable temperature control (30-80°C).
- Choice of 5 or 10 litres capacity.
- No need for safe waste tray.
- Over sink models 21051 and 21101 come supplied with spout.
- Under sink models for connection to open outlet 6 Star WELS rated tapware (accessory).
- Frost protection settings.



99075 Solo short spout vented mixer tap



99051 Hero long spout vented mixer tap



99076 Monobloc tall spout vented mixer tap



## Zip Tudor

Over sink or under sink Water Heaters  
5 litre, 10 litre open outlet to single point

### Product Selection Chart

Model	Description	Capacity (litres)	Weight (Kg)		Rating (kW)	Dimensions (mm) W x D x H
			Full	Empty		
21101	Over sink	10L	14.0	4.0	2.0	310 x 265 x 455
21102	Under sink	10L	14.0	4.0	2.0	310 x 265 x 455
21051	Over sink	5L	8.5	3.5	2.0	255 x 215 x 390
21052	Under sink	5L	8.5	3.5	2.0	255 x 215 x 390

### Technical Features

- Over sink or under sink water heaters for delivery of hot water to sinks or tubs.
- Vented tapware for under sink Tudors are 6 Star WELS rated (sold separately).
- Full external temperature control ranging from 30°C to 80°C.
- 3 litre/minute flow rate.
- Heating element rated at 2.0kW
- Open outlet to single point.
- Swivel arm open outlet spout (over sink models).
- Frost protection setting to protect the heater when not in use.
- Low watts density spiral heating element for rapid recovery and long life.
- Manually resettable over temperature safety cut out.
- External neon indicator light shows when element is 'ON'.
- Open outlet non pressurised system.

### Installation Requirements

#### Location

All models should be wall mounted using screws and plugs provided (suit most walls). The tank should be situated as close as possible to the tap.

Over sink heaters should be installed so that the outlet spout drains to a sink or basin and with a clearance of 270 mm beneath the heater to allow for service access.

Under sink heaters should be installed as closely as possible to directly below the outlet tap within the length of the supplied tap hoses.

#### Electrical

To be connected to a 10amp GPO, 220V - 240V AC power supply.

The water heater should be positioned on a wall within 1500 mm of electrical wiring GPO.

#### Plumbing

To be installed by a qualified technician in accordance with manufacturer's instructions and AS/NZS 3500 plumbing and AS/NZS 3000 wiring regulations.

Can be connected to a rising main or to a cistern with a minimum working head of 5 metres.

All water connections are via 012.7 mm BSP compression fittings.

Over sink models are supplied with a 300 mm open outlet spout.

Under sink models must be installed only with a Zip approved open outlet tap.

Over sink and under sink models are NOT interchangeable.

### Caution

Variable temperature water heaters should be set only in strict compliance with regulations governing the temperature of stored and dispensed hot water. During heating cycle, the outlet will drip. Once heating is complete, dripping will cease.

### Accessories

- 99051 - Hero mixer tap single
- 99075 - Solo mixer tap single
- 99076 - Monobloc mixer tap single
- 99132 - Solo mixer tap single disabled
- 99133 - Hero mixer tap single disabled
- 99032 - Telescopic spout


### Warranty

1 year parts and labour warranty.  
For full warranty details please visit [www.zipindustries.com](http://www.zipindustries.com)

### Technical Assistance

Contact Zip Industries (Aust.) Pty. Ltd.  
67 Allingham Street Condell Park NSW 2200  
Free Call 1800 638 633  
Telephone 02 9796 3100  
Website [www.zipindustries.com](http://www.zipindustries.com)

### Dimensions (see table above)

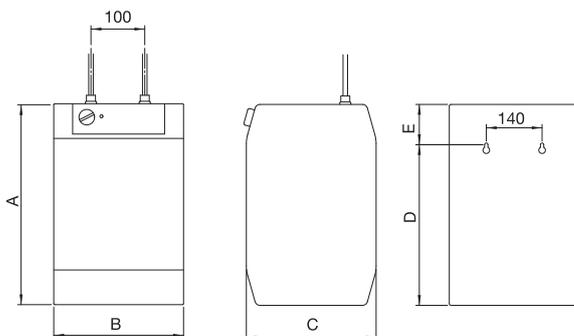

### Typical Installation over basin

