

AQUA COOLER®



UB SERIES

UNDER BENCH DRINKING WATER COOLERS

MODELS

UB1 – 8 LITRES PER HOUR

UB2 – 15 LITRES PER HOUR

UB3 – 5 LITRES PER HOUR

UB1F – 8 LITRES PER HOUR, FILTERED

UB2F – 15 LITRES PER HOUR, FILTERED

UB3F – 5 LITRES PER HOUR, FILTERED

“Out of sight” water coolers

Ideal for installation in kitchen cupboards

Fully automatic operation

Easily connected to most filter systems

Robust construction

Optional glass filler available

PROUDLY AUSTRALIAN MADE

FEATURES

CONTACT

AQUA COOLER PTY LIMITED
161 ORCHARD ROAD
CHESTER HILL NSW 2162 AUSTRALIA

TEL: (02) 9721 9333

FAX: (02) 9721 9344

EMAIL: sales@aquacooler.com.au
coolers@aquacooler.com.au

DRINKING WATER CHILLED TO PERFECTION
Visit www.aquacooler.com.au

AQUA COOLER

UB SERIES

WATER RESERVOIR

All models have a chilling chamber to meet peak usage periods. The tanks are fabricated from hard drawn, seamless copper which is tin plated for your safety.

UB1 – 0.8 litre tank, 8 litres per hour

UB2 – 1.5 litre tank, 15 litres per hour

UB3 – 0.8 litre tank, 5 litres per hour

REFRIGERATION

All use R134a refrigerant gas which is non-toxic, non-flammable and environmentally friendly. The refrigerant flow is controlled by a capillary tube, which has no moving parts. A suction line is fitted to provide maximum heat exchange.

WATER CONNECTIONS – provided in the carton

Water inlet – 6.2mm (1/4") OD Tube.

Water outlet – 6.2mm (1/4") OD Tube.

COMPRESSORS

UB1 – 1/8 hp nominal capacity

UB2 – 1/5 hp nominal capacity

UB3 – 1/16 hp nominal capacity

THERMOSTAT CONTROL

Each thermostat is factory pre-set for optimum performance.

ELECTRICAL

All models are 240 volts, 50Hz power supply and are fitted with a 2 metre house cable and 3 pin plug.

PERFORMANCE TO ARI 1010-94 STANDARD

Water Inlet – 26.7°C

Water Outlet – 10°C

Ambient Air – 32.2°C.

WEIGHT - PACKED

UB1 – 15kg

UB2 – 21.5kg

UB3 – 13kg

DIMENSIONS

UB1 – 315mm wide x 365mm high x 415mm deep

UB2 – 340mm wide x 535mm high x 440mm deep

UB3 – 315mm wide x 187mm high x 415mm deep

OPTIONAL EXTRAS


Z-3019 Glass Filler for fitment to sink.

NOTE


It is recommended that all products be vented to allow maximum air flow over the compressor. The UB2 has a vent included in the carton.



UB1

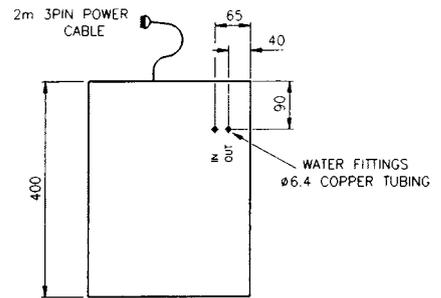


TOP VIEW




FRONT VIEW

UNIT SUPPLIED WITH WATER CONNECTIONS

UB2





TOP VIEW

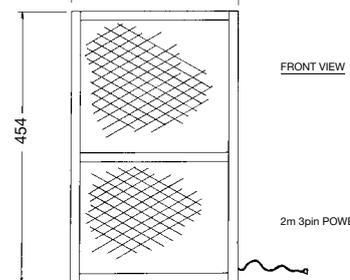

FRONT VIEW

UNIT SUPPLIED WITH VENT & WATER CONNECTIONS

UB3



UNIT SUPPLIED WITH WATER CONNECTIONS

Selection Chart

	8 Litres Per Hour	15 Litres Per Hour	5 Litres Per Hour
Filtered	5-12 People*	12-26 People*	0-5 People*
No	UB1	UB2	UB3
Yes	UB1F	UB2F	UB3F

*Approximate figures only